

## Glass Panel Heater - White



Minimal glass panel design with convection and radiant heating effect. Control via the digital display or from your smartphone via Wi-Fi.

- Electronic thermostat with LCD display.
- 7 day programmable heating schedule.
- 2 stage heating element.
- Open window and optimum start.
- Glass radiant heat panel.
- Wi-Fi control from your smartphone.
- Digital temperature control and display.

### Technical data


Voltage	230V AC 50Hz
IEC protection	Class I
Protection rating	IP24
Cable length	1m
Wiring connection	UK plug
Warranty	2 years

## Available sizes and outputs

Code	Output (W)	BTU/h	Amps (A)	Max area (m <sup>2</sup> ) <i>Good Insulation</i>	Max area (m <sup>2</sup> ) <i>Poor Insulation</i>	Weight (Kg)	Colour
TSGFR-1500-W	750 / 1500	5115	6.5	13	9	7.5	White
TSGFR-2000-W	1000 / 2000	6820	8.7	18	12	8.6	White
TSGFR-1500-B	750 / 1500	5115	6.5	13	9	7.5	Black
TSGFR-2000-B	1000 / 2000	6820	8.7	18	12	8.6	Black

## Mounting dimensions

Model	W (mm)	H (mm)	W1 (mm)	H1 (mm)
TSGFR-1500-W	675	450	378	344
TSGFR-2000-W	835	450	538	344
TSGFR-1500-B	675	450	378	344
TSGFR-2000-B	835	450	538	344

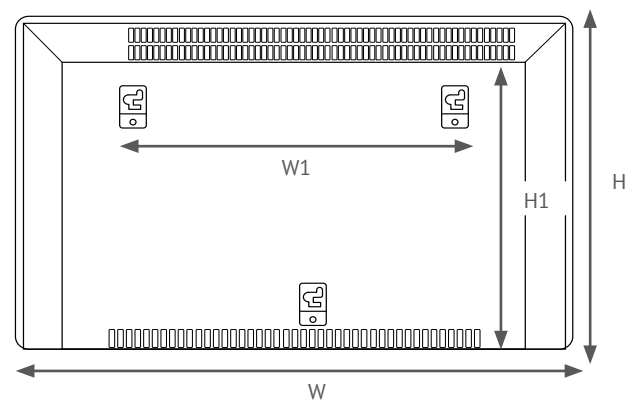

## Antomy of a glass panel heater

- Air outlet is in the top of the front face panel.
- Air inlet is in the base of the heater.
- Digital controls are in the top right corner of the front panel. Display not visible when the heater is off.
- The power switch is at the top of the right hand side panel.
- The cable is situated at the bottom of the right hand side panel.
- The ambient temperature sensor is at the bottom of the right hand side panel.

