

Convactor Panel Heater



Lightweight and easy to install as an effective, direct action convactor heater for almost any room. Digital control panel with 24/7 timer.

- Electronic thermostat with LCD display.
- 7-day programmable heating schedule.
- Manual temperature setting.
- Open window detection.
- Tubular heating element.
- Overheat protection switch.

Technical data


Voltage	230V 50Hz
IEC protection	Class II
IP rating	IP24
Cable length	1.5m (white)
Wiring connection	Direct to mains
Warranty	2 years

Available sizes and outputs

Code	Output (W)	BTU/h	Amps (A)	Max area (m ²) Good Insulation	Max area (m ²) Poor Insulation	Weight (Kg)	Colour
TSCR-0500	500	1705	2.1	5	3	4.3	White
TSCR-1000	1000	3410	4.3	9	6	4.7	White
TSCR-1500	1500	5115	6.5	13	9	5.2	White
TSCR-2000	2000	6820	8.7	18	12	6.1	White

Mounting dimensions

Code	W (mm)	H (mm)	D (mm)
TSCR-0500	520	470	100
TSCR-1000	600	470	100
TSCR-1500	720	470	100
TSCR-2000	840	470	100

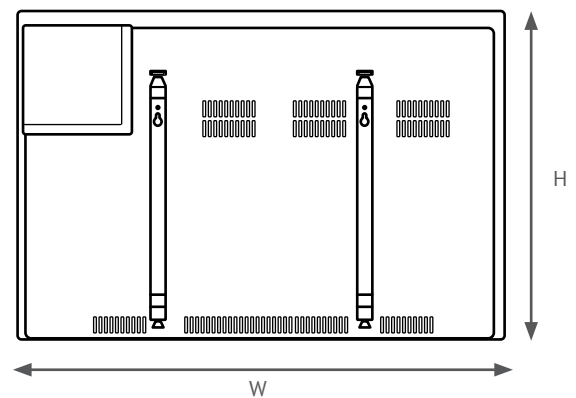

Anatomy of a convector panel heater

- Air outlet on top of the front face panel.
- Air inlet is in the base of the heater.
- Digital controls are on the right hand side of the top panel.
- The cable is situated in the middle of the right hand side panel.
- The ambient temperature sensor is at the bottom of the right hand side panel.

